

TECHSPEC<sup>®</sup> 50mm Dia. x 100mm FL VIS-EXT Coated, Double-Convex Lens



Stock **#89-201** 2 In Stock

☐ [Other Coating Options](#)

-

1

+

€83<sup>.00</sup>

ADD TO CART

| Volume Pricing |                               |
|----------------|-------------------------------|
| Qty 1-9        | €83,00 each                   |
| Qty 10-24      | €74,50 each                   |
| Qty 25-99      | €66,50 each                   |
| Need More?     | <a href="#">Request Quote</a> |

!

 Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Double-Convex Lens

Type:

Physical & Mechanical Properties


|                                      |                                             |
|--------------------------------------|---------------------------------------------|
| 50.00 +0.000/-0.025                  | Diameter (mm):                              |
| <1                                   | Centering (arcmin):                         |
| Protective as needed                 | Bevel:                                      |
| 10.00                                | Center Thickness CT (mm):                   |
| ±0.10                                | Center Thickness Tolerance (mm):            |
| 3.76                                 | Edge Thickness ET (mm):                     |
| 49.00                                | Clear Aperture CA (mm):                     |
| Optical Properties                   |                                             |
| 96.65                                | Back Focal Length BFL (mm):                 |
| 100.00                               | Effective Focal Length EFL (mm):            |
| VIS-EXT (350-700nm)                  | Coating:                                    |
| R <sub>avg</sub> <0.5% @ 350 - 700nm | Coating Specification:                      |
| N-BK7                                | Substrate: □                                |
| 40-20                                | Surface Quality:                            |
| 1.5λ                                 | Power (P-V) @ 632.8nm:                      |
| λ/4                                  | Irregularity (P-V) @ 632.8nm:               |
| 101.63                               | Radius R <sub>1</sub> =R <sub>2</sub> (mm): |
| 2.00                                 | f/#:                                        |
| 587.6                                | Focal Length Specification Wavelength (nm): |
| ±1                                   | Focal Length Tolerance (%):                 |
| 0.25                                 | Numerical Aperture NA:                      |
| 350 - 700                            | Wavelength Range (nm):                      |
| Regulatory Compliance                |                                             |
| Compliant                            | RoHS 2015:                                  |
| View                                 | Certificate of Conformance:                 |
| Compliant                            | Reach 235:                                  |

## Product Details

- AR Coated to Provide <0.5% Reflectance per Surface for 350 - 700nm
  - Minimize Aberrations Including Spherical and Coma
  - [UV Fused Silica DCX Lenses](#) Available
  - Other Coating Options Available: [Uncoated](#), [MgF<sub>2</sub>](#), [VIS 0°](#), [NIR I](#), [NIR II](#), [VIS-NIR](#), and [YAG-BBAR](#)
- TECHSPEC® VIS-EXT Coated Double-Convex (DCX) Lenses, also referred to as bi-convex lenses, have two positive, symmetrical faces with equal radii on both sides. These lenses are generally recommended for finite imaging applications with a conjugate ratio (ratio between object distance and image distance) between 0.2 and 5. At a conjugate ratio of 1, aberrations such as spherical aberration, chromatic aberration, coma, and distortion are minimized or cancelled due to the symmetric lens design. TECHSPEC VIS-EXT Coated Double-Convex Lenses are available in a variety of substrates and coating options for the visible and NIR spectra.

## Technical Information




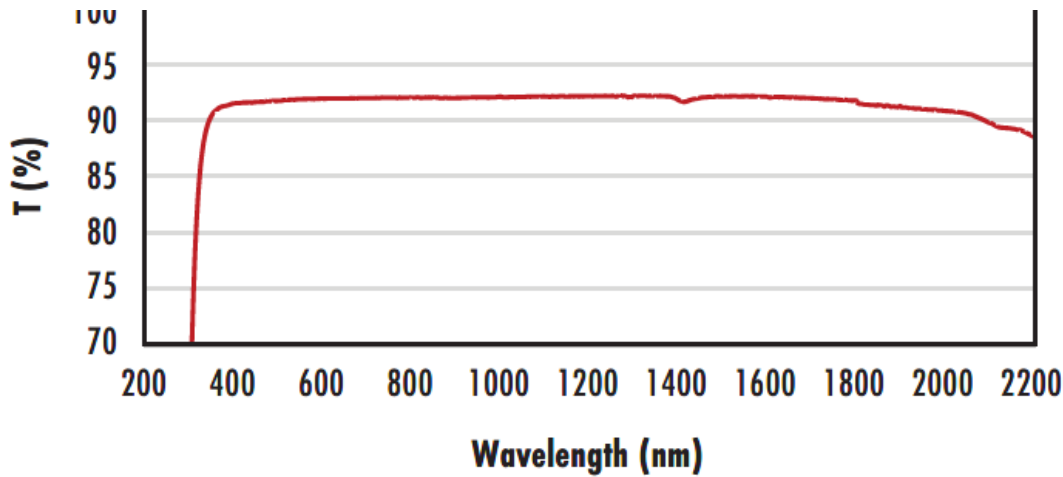

Typical transmission of a 3mm thick, uncoated N-BK7 window across the UV - NIR spectra.

[Click Here to Download Data](#)

**N-BK7 with MgF<sub>2</sub> Coating  
Typical Transmission**

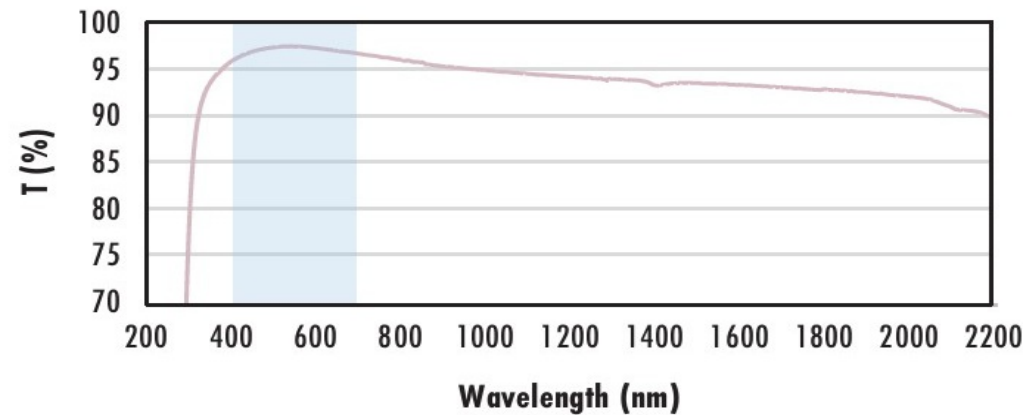

Typical transmission of a 3mm thick N-BK7 window with MgF2 (400-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 1.75\% \text{ @ } 400 - 700\text{nm (N-BK7)}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS-EXT Coating  
Typical Transmission**

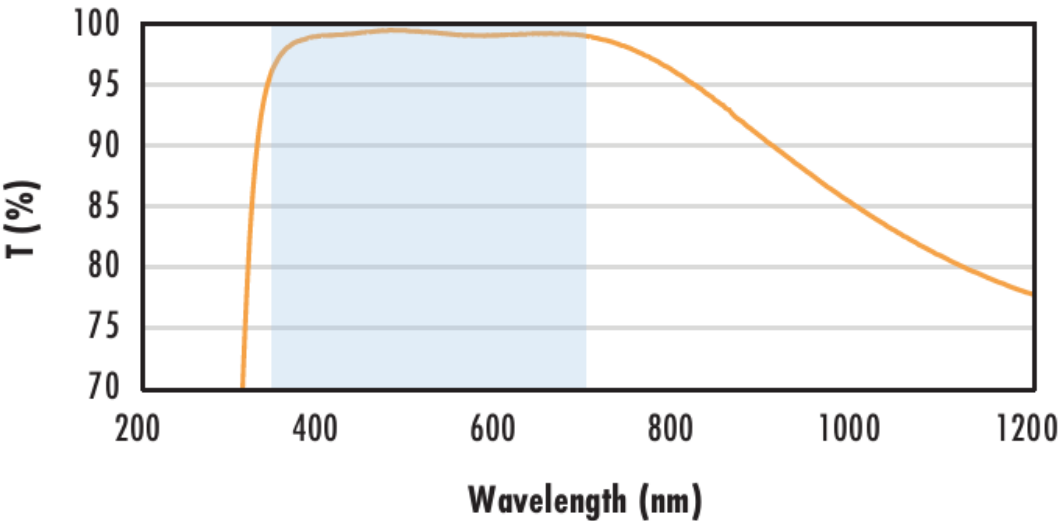

Typical transmission of a 3mm thick N-BK7 window with VIS-EXT (350-700nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% \text{ @ } 350 - 700\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS-NIR Coating  
Typical Transmission**

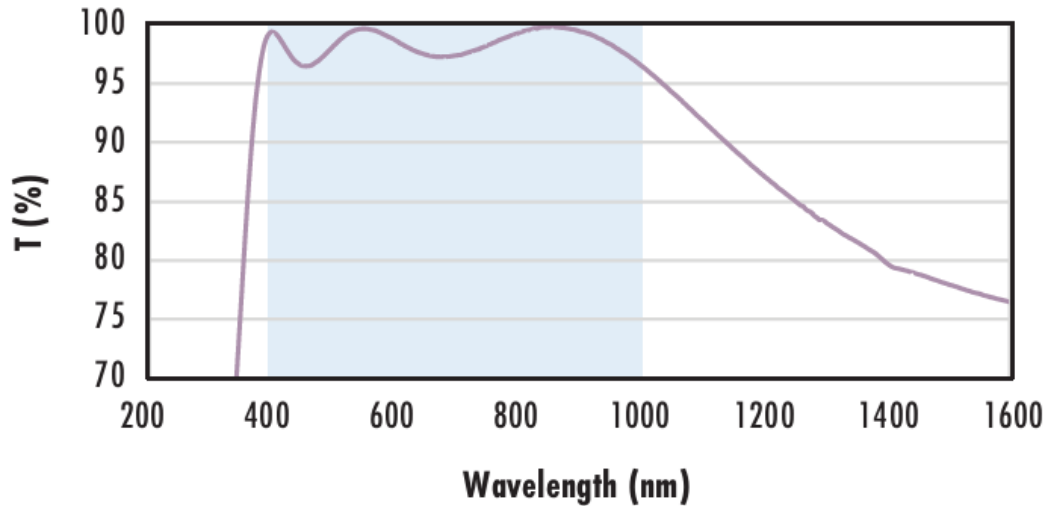

Typical transmission of a 3mm thick N-BK7 window with VIS-NIR (400-1000nm) coating at 0° AOI.


The blue shaded region indicates the coating design wavelength range, with the following specification:

$$\begin{aligned} R_{abs} &\leq 0.25\% \text{ @ } 880\text{nm} \\ R_{avg} &\leq 1.25\% \text{ @ } 400 - 870\text{nm} \\ R_{avg} &\leq 1.25\% \text{ @ } 890 - 1000\text{nm} \end{aligned}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

**N-BK7 with VIS 0° Coating  
Typical Transmission**

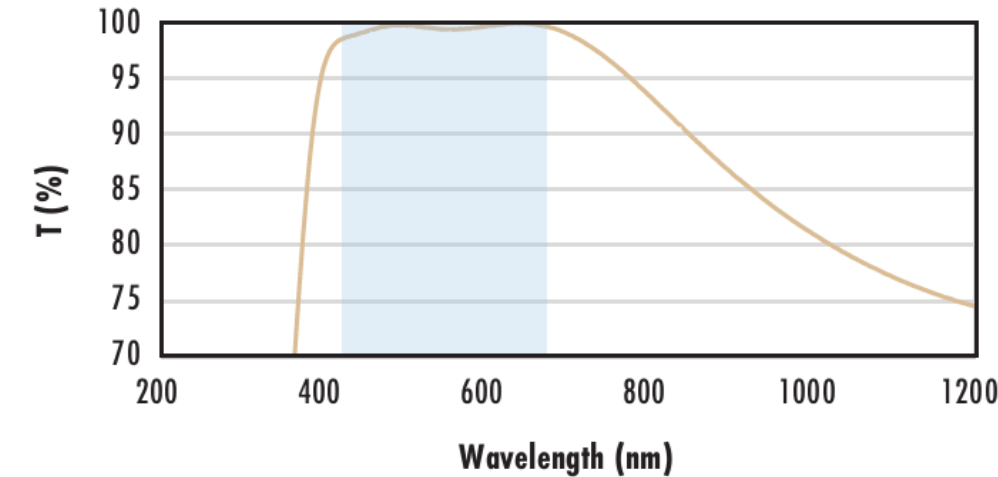


Typical transmission of a 3mm thick N-BK7 window with VIS 0° (425-675nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.4\% \text{ @ } 425 - 675\text{nm}$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

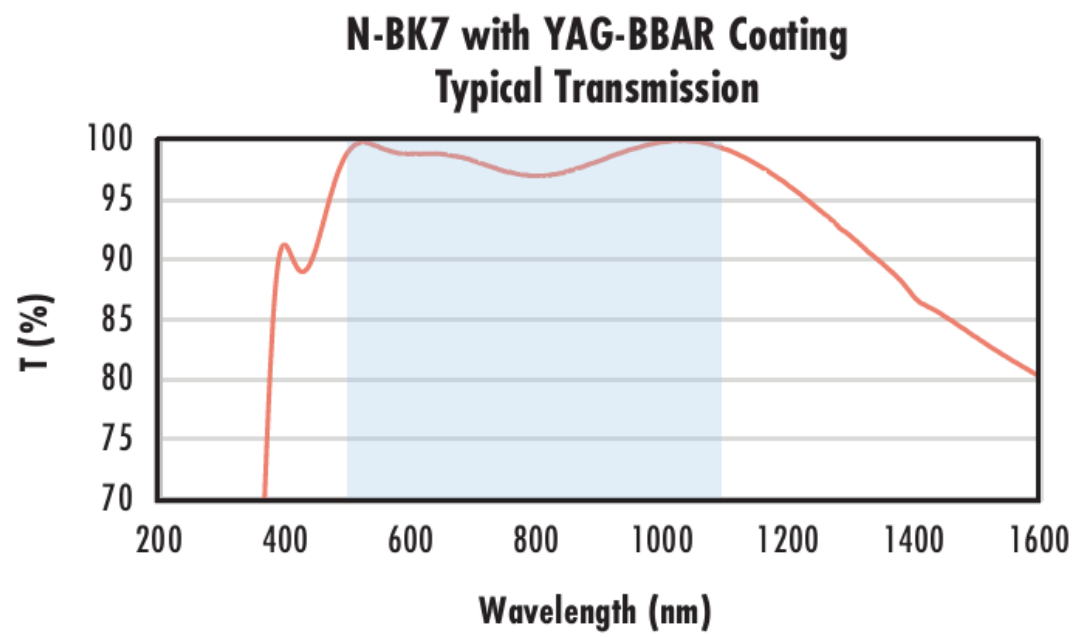


Typical transmission of a 3mm thick N-BK7 window with YAG-BBAR (500-1100nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{\text{abs}} \leq 0.25\% @ 532\text{nm}$   
 $R_{\text{abs}} \leq 0.25\% @ 1064\text{nm}$   
 $R_{\text{avg}} \leq 1.0\% @ 500 - 1100\text{nm}$

Data outside this range is not guaranteed and is for reference only.

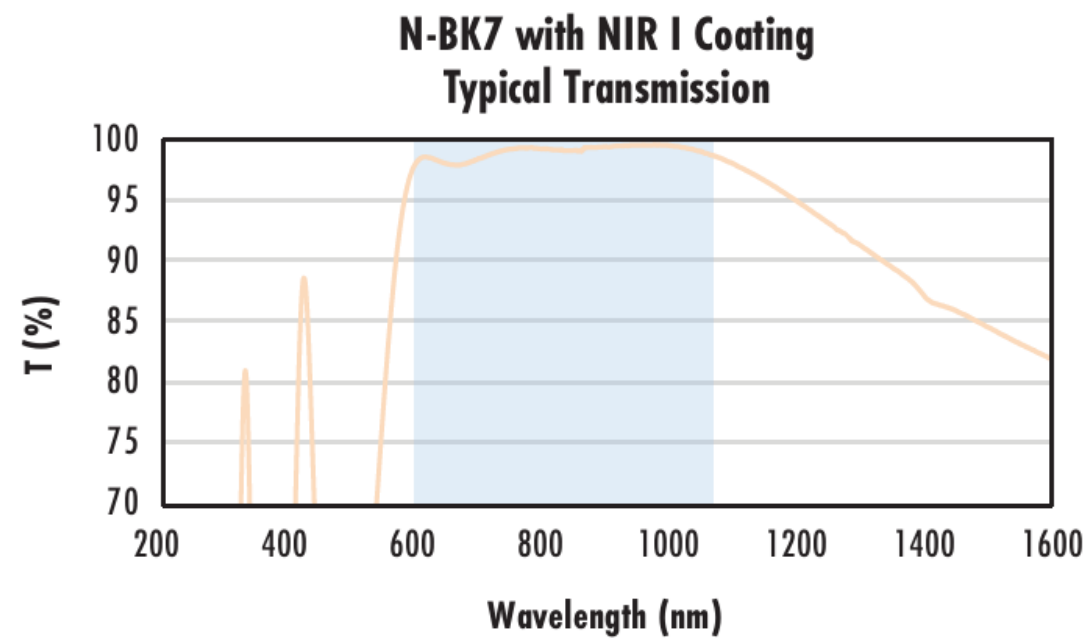[Click Here to Download Data](#)


Typical transmission of a 3mm thick N-BK7 window with NIR I  
(600 - 1050nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$$R_{avg} \leq 0.5\% @ 600 - 1050nm$$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

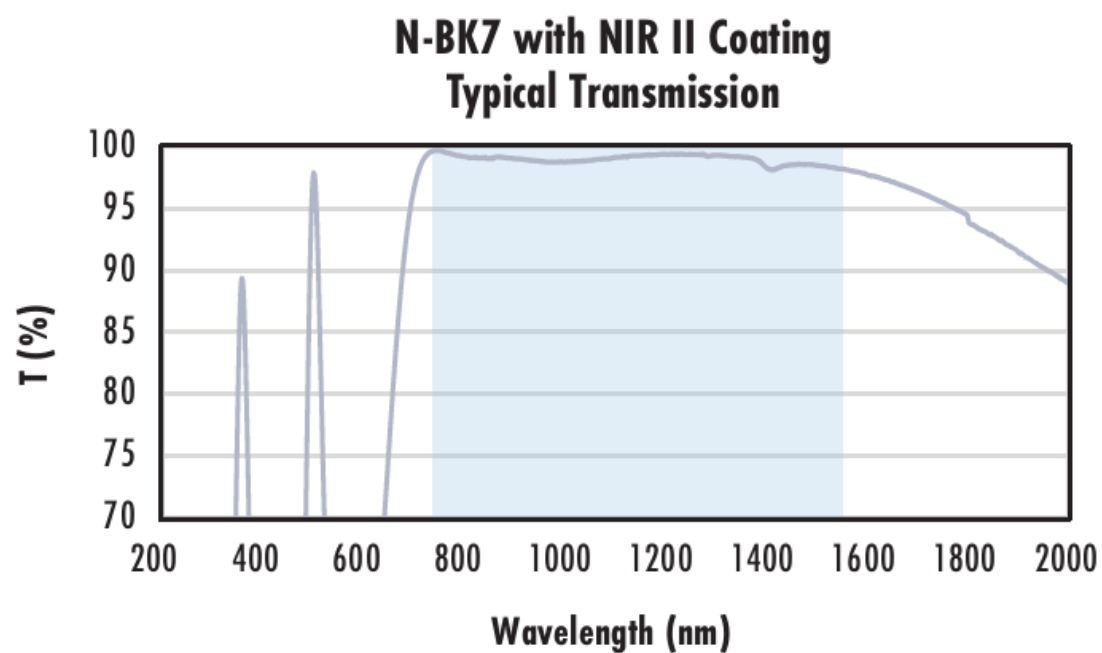

Typical transmission of a 3mm thick N-BK7 window with NIR II (750 - 1550nm) coating at 0° AOI.

The blue shaded region indicates the coating design wavelength range, with the following specification:

$R_{abs} \leq 1.5\% @ 750 - 800\text{nm}$   
 $R_{abs} \leq 1.0\% @ 800 - 1550\text{nm}$   
 $R_{avg} \leq 0.7\% @ 750 - 1550\text{nm}$

Data outside this range is not guaranteed and is for reference only.

[Click Here to Download Data](#)

## Compatible Mounts