

[See all 23 Products in Family](#)

TECHSPEC® 5mm Dia., Enhanced Deep UV (DUV) Mirror



Precision Ultraviolet Mirrors

Stock #18-739 **8 In Stock**

⊖ 1 ⊕ €300.⁰⁰

ADD TO CART

| Volume Pricing | |
|----------------|-------------------------------|
| Qty 1-5 | €300,00 each |
| Qty 6-25 | €238,00 each |
| Qty 26-49 | €224,00 each |
| Need More? | Request Quote |

ⓘ Prices shown are exclusive of VAT/local taxes

Product Downloads

General

Flat Mirror **Type:**

Physical & Mechanical Properties

5.00 +0.0/-0.2 **Diameter (mm):**

Thickness (mm):

2.00 ±0.20

Commercial Polish

Back Surface:

90

Clear Aperture (%):

<30

Parallelism (arcsec):

Optical Properties

Metal

Coating Type:

Enhanced Aluminum (190-900nm)

Coating:

λ/10

Surface Flatness (P-V):

190 - 900

Wavelength Range (nm):

190

Design Wavelength DWL (nm):

Fused Silica (Corning 7980)

Substrate:

0

Angle of Incidence (°):

R_{avg} ≥92% @ 190 - 250nm
R_{avg} ≥83% @ 250 - 900nm

Coating Specification:

20-10

Surface Quality:

Material Properties

10⁻⁷ Torr

Vacuum Compatibility:

Regulatory Compliance

Compliant

RoHS 2015:

View

Certificate of Conformance:

Compliant

REACH 241:



Product Details

- 120nm and 190nm Design Wavelengths
- Average Reflectivity >85% Across Specified Range
- Enhanced Metallic Coatings for Broadband Reflectivity through the Visible Region

TECHSPEC® Precision Ultraviolet Mirrors are ideal for most commercially available light sources and are offered in both Deep UV (DUV) and Vacuum UV (VUV) enhanced coating options. The DUV coating offers excellent reflection from 190nm to the long-wave infrared (LWIR), while the VUV coating has optimized reflection from 120nm to the LWR. These mirrors are designed for 0° angle of incidence and feature an aluminum-based coating for low polarization sensitivity. TECHSPEC® Precision Ultraviolet Mirrors have an average reflectivity of greater than 85% across a specified range. The mirrors are available in diameters ranging from 5 to 50mm.

Note: The soft coating can be easily damaged by fingerprints and aerosols.

Technical Information

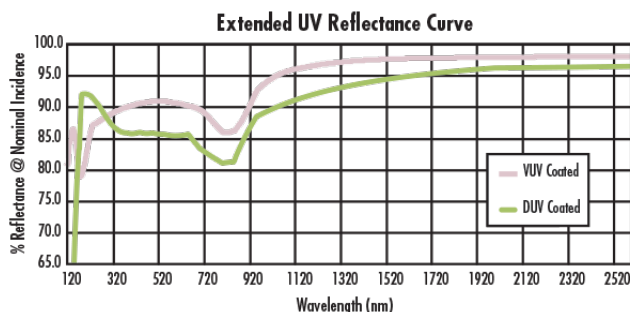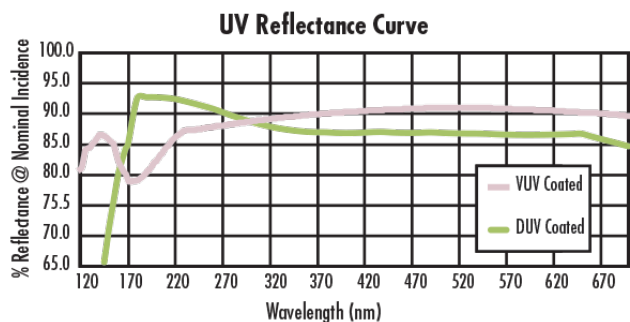



Special Handling

These optics require special handling to avoid damage and ensure long-term performance. Proper handling, cleaning, and storage are essential to maintain optical quality. Explore our [Optics Cleaning Resources](#) for step-by-step guides and best practices. For personalized assistance, [Email us](#) or [Chat](#) with our technical support team.



Component Handling Tools

Compatible Mounts